
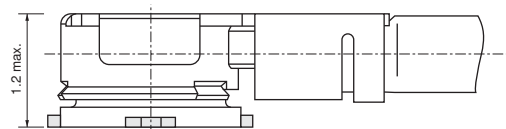


Microwave Coaxial Connectors

Microwave Coaxial Cable Connectors



MM4829-2702

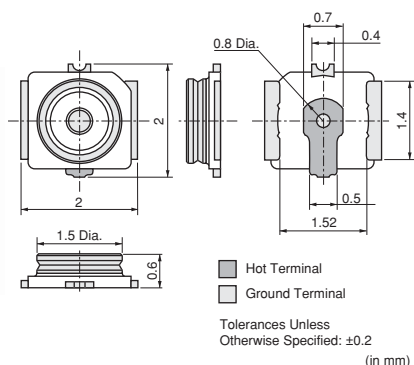

(in mm)

Dimensions

MM5829-2700

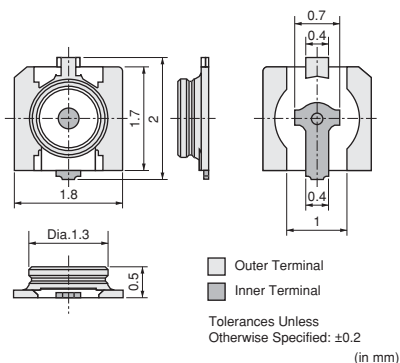

(in mm)


Dimensions

| Part Number | Rated Voltage (Vrms) | Frequency Rating (GHz) | Temperature Range | VSWR |
|-------------|----------------------|------------------------|-------------------|-----------------------|
| MM4829-2702 | 30 | to 6.0 | -40 to +85°C | 1.3 max. (DC to 3GHz) |
| MM5829-2700 | 30 | to 12 | -40 to +85°C | 1.3 max. (DC to 3GHz) |
| MXHP32 | 30 | to 6.0 | -40 to +85°C | 1.3 max. (DC to 3GHz) |
| MXJA01 | 30 | to 12 | -40 to +85°C | 1.3 max. (DC to 3GHz) |

Impedance: 50ohm

Continued from the preceding page.

**Measurement Probe for MM8930-2600
 (P/N: MXHQ87PA3000)**

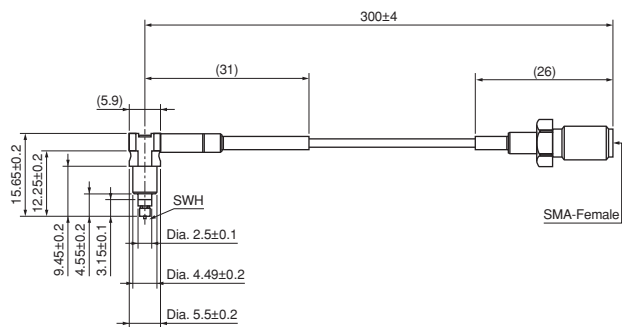

(in mm)

| Part Number | Rated Voltage (Vrms) | Frequency Rating (GHz) | Temperature Range | VSWR |
|--------------------|-------------------------|---------------------------|-------------------|-----------------------|
| MM8030-2610 | 30 | to 11 | -40 to +85°C | 1.2 max. (DC to 3GHz) |
| MM8130-2600 | 30 | to 6 | -40 to +85°C | 1.2 max. (DC to 3GHz) |
| MM8430-2610 | 30 | to 6 | -40 to +85°C | 1.2 max. (DC to 3GHz) |
| MM8930-2600 | 30 | to 6 | -40 to +85°C | 1.2 max. (DC to 3GHz) |

Impedance: 50ohm

